

C15

440 ekW/ 550 kVA/ 50 Hz/ 1500 rpm/ 400 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION



Image shown may not reflect actual configuration

C15

440 ekW/ 550 kVA
50 Hz/ 1500 rpm/ 400 V

Metric

English

Package Performance

Genset Power Rating with Fan @ 0.8 Power Factor	440 ekW	
Genset Power Rating	550 kVA	
Aftercooler (Separate Circuit)	N/A	N/A

Fuel Consumption

100% Load with Fan	112.5 L/hr	29.7 gal/hr
75% Load with Fan	84.1 L/hr	22.2 gal/hr
50% Load with Fan	59.1 L/hr	15.6 gal/hr
25% Load with Fan	35.6 L/hr	9.4 gal/hr

Cooling System¹

Engine Coolant Capacity	20.8 L	5.5 gal
-------------------------	--------	---------

Inlet Air

Combustion Air Inlet Flow Rate	29.9 m ³ /min	1056.8 cfm
Max. Allowable Combustion Air Inlet Temp	48 ° C	119 ° F

Exhaust System

Exhaust Stack Gas Temperature	527.0 ° C	980.5 ° F
Exhaust Gas Flow Rate	86.0 m ³ /min	3037.7 cfm
Exhaust System Backpressure (Maximum Allowable)	10.0 kPa	40.0 in. water

C15

440 ekW/ 550 kVA/ 50 Hz/ 1500 rpm/ 400 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION

Heat Rejection

Heat Rejection to Jacket Water	166 kW	9441 Btu/min
Heat Rejection to Exhaust (Total)	398 kW	22635 Btu/min
Heat Rejection to Aftercooler	83 kW	4715 Btu/min
Heat Rejection to Atmosphere from Engine	70 kW	3975 Btu/min
Heat Rejection to Atmosphere from Generator	28 kW	1564 Btu/min

Alternator²

Motor Starting Capability @ 30% Voltage Dip	1291 skVA
Current	794 amps
Frame Size	A2985L4
Excitation	SE
Temperature Rise	150 ° C

Emissions (Nominal)³

NOx	3689.6 mg/Nm ³	7.3 g/hp-hr
CO	168.2 mg/Nm ³	0.3 g/hp-hr
HC	5.8 mg/Nm ³	0.0 g/hp-hr
PM	7.0 mg/Nm ³	0.0 g/hp-hr

DEFINITIONS AND CONDITIONS

1. For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.
2. UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.
3. Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

C15

440 ekW/ 550 kVA/ 50 Hz/ 1500 rpm/ 400 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION

Applicable Codes and Standards:

AS1359, CSA C22.2 No100-04, UL142, UL489, UL869, UL2200,
NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528,
NEMA MG1-22, NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions

Fuel Rates are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

www.Cat-ElectricPower.com

Performance No.: DM8495-03

Feature Code: C15DEKL

Generator Arrangement: 5029783

Date: 01/31/2018

Source Country: U.K.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



Image shown may not reflect actual configuration

C15 Sound Attenuated Enclosures

50 Hz / 60 Hz

These sound attenuated, factory installed enclosures incorporate internally mounted super critical level silencers, designed for safety and aesthetic value on integral fuel tank base or optional dual wall integral fuel tank base for total fluid containment. These enclosures are of extremely rugged construction to withstand exposure to the elements and provide weather protection.

Features

Robust / Highly Corrosion Resistant Construction

- Factory installed on integral fuel tank base
- Environmentally friendly, polyester powder baked paint
- 1.6 mm (0.063 in) galvanized steel
- All round overhanging base to protect enclosure
- High-grade engineering thermoplastic corner posts for protection
- Integral lifting frame
- Compression door latches giving solid door seal
- Zinc plated or black coated stainless steel fasteners
- Internally mounted super critical exhaust silencing system

Excellent Access

- Large cable entry area for installation ease
- Accommodates rear mounted breaker and control panel
- Double doors on both sides
- Vertically hinged doors with solid bar door stays to hold doors open at 135° rotation
- Lube oil and coolant drains pipes to exterior of enclosure and terminated drain valves
- Radiator fill cover

Security and Safety

- Lockable access doors which give full access to control panel and breaker
- Cooling fan and battery charging alternator fully guarded
- Fuel fill, oil fill and battery can only be reached via lockable access
- Externally mounted emergency stop button
- Designed for spreader-bar lifting to ensure safety
- Control panel viewing window
- Stub-up area is rodent proof


Options

- Caterpillar yellow or white paint
- Integral dual wall fuel tank base for total fluid containment (fuel, oil and coolant)

Enclosure Package Operating Characteristics

Model	kVA	ekW	SB/PP	LWA	Sound Pressure Levels dBA				Air Flow Rate		Ambient Capability at 100% Load*	
					1m (3.3 ft)		7m (23 ft)					
					75% Load	100% Load	75% Load	100% Load	m³/s	cfm	°C	°F
50 Hz												
DE500E0	455	364	PP	98	79	79	69	70	5.7	12078	44	111
	500	400	SB	98	79	80	69	70	5.7	12078	45	113
DE550E0	500	400	PP	98	79	80	69	70	5.7	12078	40	104
	550	440	SB	98	79	80	70	71	5.7	12078	41	106
DE550E3	500	400	PP	–	82	83	73	74	6.1	12925	54	129
	550	440	SB	–	83	84	73	75	6.1	12925	52	126
60 Hz												
DE450SE0	513	410	PP	–	81	82	71	72	6.3	13349	47	117
	563	450	SB	–	82	83	71	73	6.3	13349	49	120
DE500SE0	569	455	PP	–	82	83	71	73	6.3	13349	43	109
	625	500	SB	–	82	83	72	73	6.3	13349	45	113

*Ambient capability measured with the Cat extended life coolant at sea level.

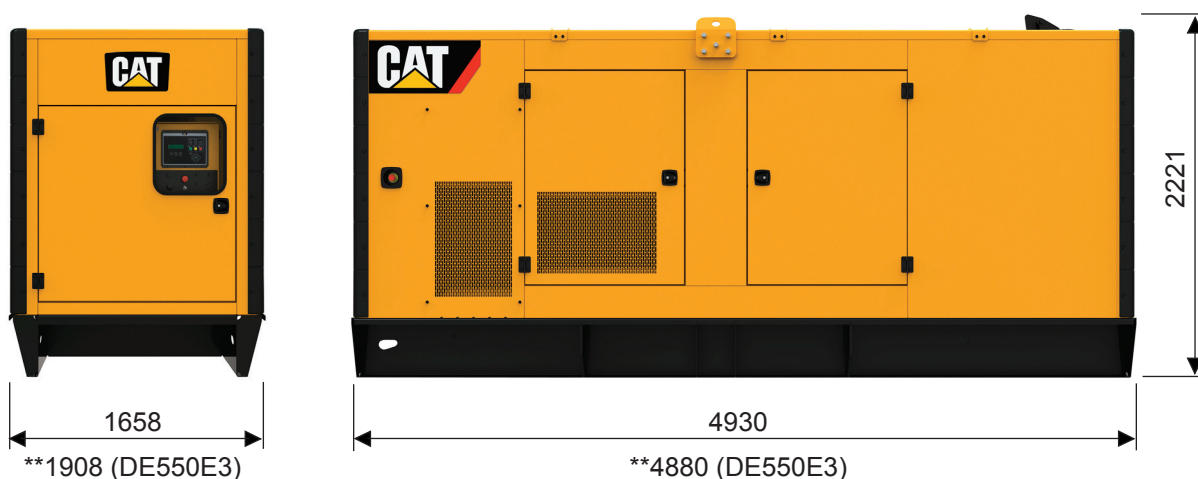

Approximate weight of enclosure package: 5071 kg (11180 lb), **5300 kg (11685 lb) DE550E3. Exact weight is dependent on options. Enclosure weight includes: sound attenuated enclosure, exhaust system, base and generator set.

www.cat.com/electricpower

©2016 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



Image shown may not reflect actual package.

C13/C15 INTEGRAL FUEL TANK BASE

Diesel Generator Set
350 – 550 kVA 50 Hz
320 – 500 kW 60 Hz

FEATURES

- Tank design provides capacity for thermal expansion of fuel
- Integral diesel fuel tank is incorporated into the generator set base frame
- Direct reading fuel level gauge
- Fuel supply dip tubes positioned so as not to pick up fuel sediment
- Fuel return and supply dip tubes are separated by an internal baffle to prevent recirculation of heated return fuel
- Fuel fill – 76.2 mm (3 in), lockable flip top cap
- Tanks are leak tested at 31 kPa (4.5 psi) minimum
- Heavy gauge steel gussets suitable for lifting package
- Polyester powder coating – Gloss black textured finish
- Primary tanks are equipped with customer connections for remote fuel transfer, return and vent
- Sloped top tank plate to front to contain accidental coolant, oil and fuel spillages
- Sloped bottom tank plate to middle for fuel drainage
- Rear stub-up access

DESCRIPTION – SINGLE WALL TANKS

- Single wall design
- Heavy construction 6 mm (0.24 in) steel plate side channels and 4 mm (0.16 in) sheet steel tank design
- Standard offering for open and enclosed (High Ambient and Sound Attenuated) generator sets

DESCRIPTION – DUAL WALL TANKS

- Secondary containment – Open top design
- Welded steel basin designed to contain a minimum of 110% of primary tank capacity (total fluid containment)
- Heavy construction 6 mm (0.24 in) steel plate side channels and 4 mm (0.16 in) sheet steel tank design
- Option for enclosed (High Ambient and Sound Attenuated) generator sets

OPTIONS

- Manual fuel transfer pump
- Low fuel level alarm
- Low fuel level shutdown
- High fuel level alarm

ATTACHMENTS




C13/C15 FUEL TANKS BASE (INTEGRAL) DIMENSIONS AND CAPACITIES

Configuration	Single / Dual Wall	Fillable Capacity		Usable Capacity		Weight (Dry)	
		Litres	Gallons	Litres	Gallons	kg	lb
Open (Standard)	Single	888	235	839	222	524	1155
Enclosed* (Standard)	Single	887	234	842	222	810	1786
Enclosed* (Option)	Dual	873	231	827	218	1021	2251

Configuration	Single / Dual Wall	Width		Length 'L'		Height 'H'		Package Height C13		Package Height C15	
		mm	in	mm	in	mm	in	mm	in	mm	in
Open (Standard)	Single	1110	43.7	3800	149.6	430	16.9	2156	84.9	2215	87.2
Enclosed* (Standard)	Single	1620	63.8	4930	194.1	340	13.4	2317	91.2	2317	91.2
Enclosed* (Option)	Dual	1620	63.8	4930	194.1	390	15.4	2367	93.2	2367	93.2

*Available for both Sound Attenuated and High Ambient Enclosed Generator Sets.

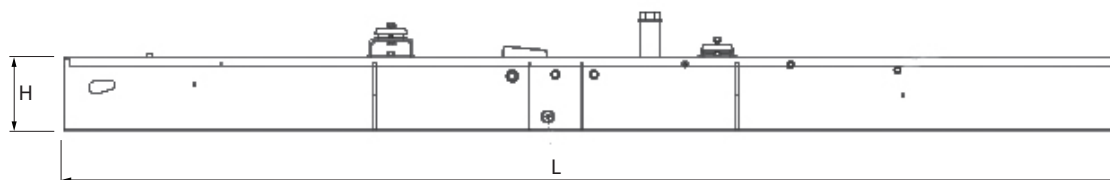

The heights listed above do not include lumber used during manufacturing and shipping.
Weight is for tank only. Does not include additions or removals required by price list.
All fuel tanks are shipped "installed."

www.Cat-ElectricPower.com

2013 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.
The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.